




EXPA FLOOR COAT EMULSION



WATER BASED

Expa Floor Coat Emulsion is based on 100% Pure Acrylic Emulsion designed specifically for application on Exterior Floor Tiles. It is reinforced with Special Silicone Emulsion to offer outstanding water resistance, scrub resistance with enhanced adhesion over Terrace Floor Tiles, Cement Tiles or any other plain cement surfaces. It offers excellent resistance properties against abrasion from human, vehicular traffic, sun and fungal-algal attack.

PRODUCT FEATURES

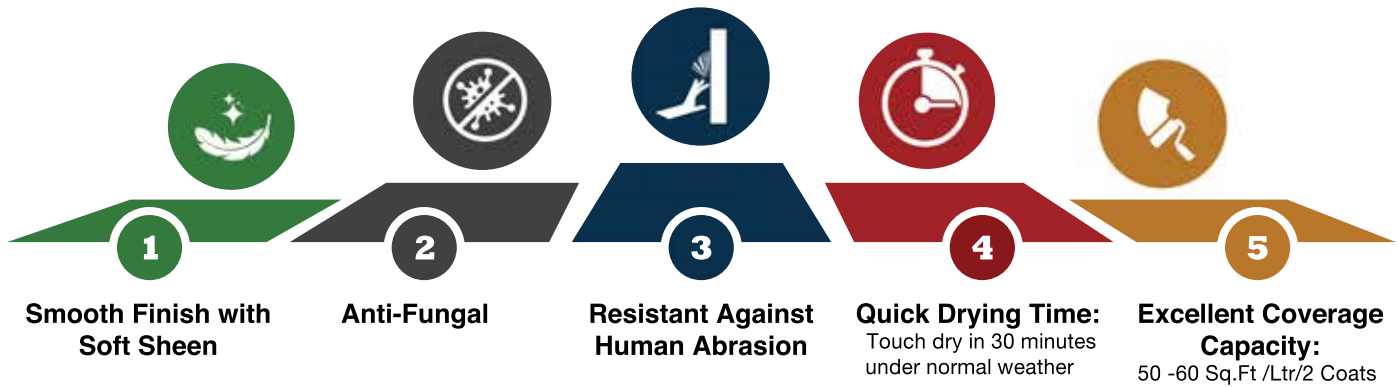

HOW TO APPLY

Performance of Floor Coat Emulsion depends on surface preparation and application as outlined below.

Step 1

Surface to be painted should be washed with hose water to remove loose dust, dirt etc. Vigorous scrub with hard wire brush/Emery Paper is mandatory for removing Algae, Fungus, Moss, Mildew etc. followed by removing the residues with high pressure water jet.

Step 2

Apply a self-priming coat by brush /roller after dilution with 30-40% potable water and allow to dry for 6-8 hrs.

Step 3

Apply 2 Coats keeping an interval 6-7 Hours in between the coats.

Step 4

Light trafficking is recommended after 24 Hours of drying. Heavy traffic may be allowed after 72 hours of drying.

Step 5

Floor Coat is not recommended to use over glazed/ ceramic tiles, previously painted glossy surfaces, bituminous surfaces etc.

(The information herein is given in good faith. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface)

(Please note that this product technical data sheet supersedes all previous versions.)

FOR MORE ENQUIRY

19 D.D.A. Commercial Complex, Kailash Colony Extn. Zamrudpur, New Delhi-110048
Ph.: 011- 29240394-0396, 29231992, E-mail: sales@britishpaints.in

TOLL FREE 1800-111-300

+91 8882022255

www.britishpaints.in

Also Follow us on

