



TECHNICAL DATA


Areas of Application	: All types of plasters, hard boards, false ceiling, asbestos sheets & concrete
Viscosity of Supply	: 11 to 15 ps by Rotothinner at 30°C
Consistency	: Thick and Buttery
Thinner	: Municipal / Potable Water
Method of Application	: Brush / Roller
Spreading Capacity	: 130-150 sq ft. / ltr. /2 coats(depending on the shade and the texture of surface)
Drying Time	: Surface dry time 5-10 minutes (@ 28°-30°C & 60 ± 5% R.H.) Recoating Period 3-4 hours
Finish	: Smooth Matt with Slight Sheen
Shades Available	: As per shade card

GLAMOUR ADVANCED PREMIUM ACRYLIC EMULSION



Glamour Advanced Premium Acrylic Emulsion is the choice paint for the beautiful interior of a dream home, available in the widest range of mood creating shades. It dries rapidly and is perfectly washable to give the walls a freshly painted look year-after-year. Its characteristic sheen helps in reducing dirt pick-up and gives the walls a rich finish. Based on a highly durable pure acrylic binder, Glamour Premium Acrylic Emulsion provides long lasting protection to interiors. It is characterized by excellent flow, leveling, opacity & smooth finish and has excellent antifungal properties.

PRODUCT FEATURES

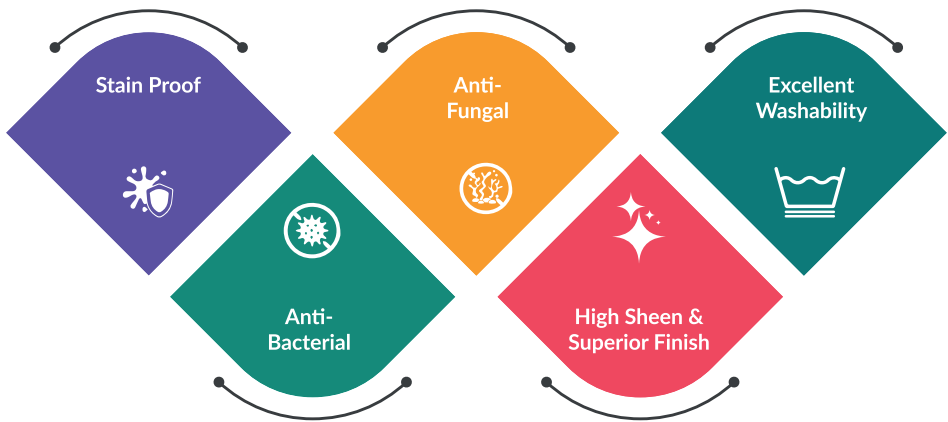

PACKS AVAILABLE



HOW TO APPLY

Performance of Glamour Premium depends on surface preparation & application as outlined below.

☞ SURFACE PREPARATION

Sand the surface with emery paper no. 180 to remove loose particles, paint, dust, cracked & flaked paint, and wipe clean.

☞ PRIMER

Apply a coat of British Paints Solvent Thinnable Primer or Water Thinnable Supra Acrylic Cement Primer (For repainting use Water Thinnable Supra Acrylic Cement Primer and for new surface Solvent Thinnable Primer is recommended) and allow drying for 6-8 hours.

☞ PUTTY

Smoothen the surface by filling dents with a thin coat of British Paints Acrylic Wall Putty and allow drying for 4-6 hours. Sand the surface with emery paper no. 180 and wipe clean.

☞ PRIMER

Apply another coat of British Paints Solvent Thinnable Primer or Water Thinnable Supra Acrylic Cement Primer and allow drying for 6-8 hours. Sand the surface with emery paper no. 320 and wipe clean.

☞ TOP COAT

Thin 1 litre of Glamour Advanced Premium Acrylic Emulsion with 500-600 ml of water. Apply 2-3 coats of this thinned paint within a gap of 3-4 hours in between two coats.

(The information herein is given in good faith. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface)

(Please note that this product technical data sheet supersedes all previous versions.)