



## TECHNICAL DATA


Areas of Application	: Interior Cement Plaster, Asbestos Sheet, Concrete etc.
Consistency	: Smooth and Free-Flowing
Thinner	: Municipal / Potable Water
Thinner	: 50-60% by volume with water for each coat
Method of Application	: Brush/Roller
Drying Time	: Touch dry in 30 minutes
Recoating Period	: About 4-6 hrs.
Covering Capacity (Spreading by Brushing)	: 90-100 sq. ft. / ltr. /2 coats (depending on surface smoothness/ surface absorption)
Finish	: Smooth and Matt
Shades Available	: As per shade card

# MASTERBLASTER SMART INTERIOR EMULSION



**British Paints MasterBlaster Smart Interior Emulsion** is a super quality Economy Water Thinnable coating for application on the interior surface and provides a rich smooth finish near to the price of Distemper. MasterBlaster Smart outperforms conventional distempers in all respects be its durability, hiding, covering capacity, washability, finish, etc.

## PRODUCT FEATURES

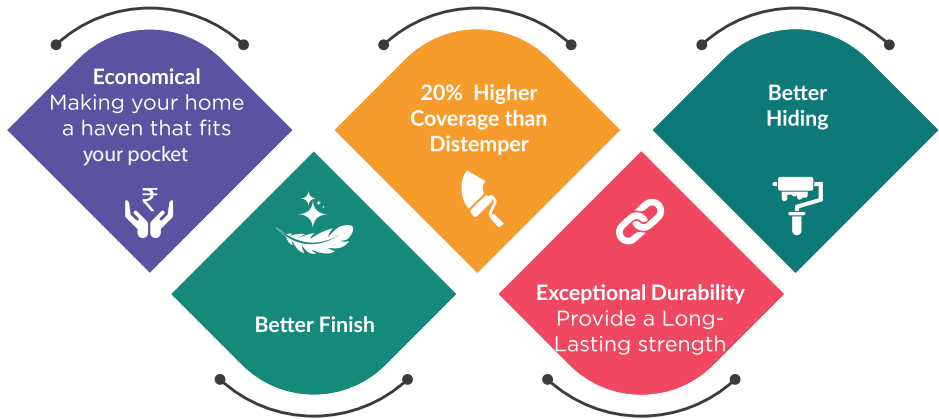

### PACKS AVAILABLE



## HOW TO APPLY

Performance of MasterBlaster Smart depends on surface preparation & application as outlined below.

### SURFACE PREPARATION

Sand the surface with emery paper no 180 to remove loose particles, dust, cracked & flaked paint, and wipe clean.

### PRIMER

Apply a coat of British Paints Solvent Thinnable Primer or Water Thinnable Supra Acrylic Cement Primer (For repainting use Water Thinnable Supra Acrylic Cement Primer and for new surface Solvent Thinnable Primer is recommended) and allow drying for 6-8 hours.

### PUTTY

Smoothen the surface by filling dents with a thin coat of British Paints Acrylic Wall Putty and allow drying for 4-6 hours. Sand the surface with emery paper no. 180 and wipe clean.

### PRIMER

Apply another coat of British Paints Solvent Thinnable Primer or Water Thinnable Supra Acrylic Cement Primer and allow drying for 6-8 hours. Sand the surface with emery paper no. 330 and wipe clean.

### TOP COAT

Thin 1 liter of MasterBlaster Smart Interior Emulsion with 500-600 ml of water. Apply 2-3 coats of this thinned paint with a gap of 4-5 hours in between two coats.

(The information herein is given in good faith. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface)

(Please note that this product technical data sheet supersedes all previous versions.)