




SHEER CLASS

METALLICS ECO



Sheer Class Metallics ECO is a premium quality water-based metallic finish paint which creates a variety of effects on interior & exterior wall and is based on the pure acrylic emulsion.

PRODUCT FEATURES

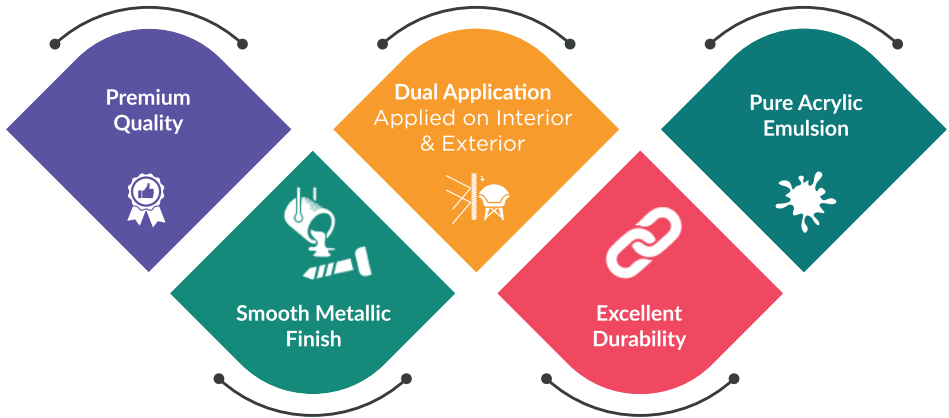

PACKS AVAILABLE



HOW TO APPLY

Performance of Sheer Class Metallics Eco depends on surface preparation & application as outlined below.

SURFACE PREPARATION

Ensure that the surface to be painted is thoroughly clean, dry, and free from all loose dirt, chalk, grease, fungi, algae and flaking paint etc.

PRIMER

Apply a coat of British Paints Solvent Thinnable or Water Thinnable Acrylic Cement Primer for repainting use Water Thinnable Acrylic Cement Primer and for new surface Solvent Thinnable Primer is recommended) & water Thinnable Exterior Wall Primer (in case of Exteriors) & allow drying for 6-8 hours

PUTTY

Surface imperfections like holes, dents and cracks are to be filled with British Paints British Wall Putty or Acrylic Wall Putty (in case of Interiors). However, British Wall Putty can also be used for interiors as well.

PRIMER

Apply another coat of Primer & allow drying for 6-8 hours.

EMULSION (Base Coat)

Thin 1 Liter of Master Blaster Smart Interior Emulsion with 500-600 ml of water. Apply 2-3 coats of Sheer Class Splendor (in case of Interiors) or our any other premium interior Emulsion & Expa 7 (in case of exteriors) or our any other premium Exterior Emulsion suitably.

SHEER CLASS METALLICS ECO (Top Coat)

Apply 1 coat of Sheer Class Metallics Eco with 200-300 ml dilution (max) as a top coat for either flat finish or use special effects tool to create the desired pattern.

(The information herein is given in good faith. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface)

(Please note that this product technical data sheet supersedes all previous versions.)