



## TECHNICAL DATA


Areas of Application	: Cement Plastered surfaces, walls, ceilings, primed wood surfaces
Viscosity of Supply	: 100 ± 10 sec / b4 / 30°C
Method of Application	: Brush / Roller / Spray
Recommended Primers for Cement Plaster	: British Paints Solvent Thinnable Primer minimum 2 coats.
For Wood	: British Paints Wood Primer Pink or White
Thinner Recommended	: British Paints Synthetic Thinner
Application Viscosity for Brushing	: Supply viscosity can be thinned with 2-3% of recommended thinner (if necessary) depending on surfaces.
For Spraying / Roller	: Application viscosity is to be adjusted with recommended thinner.
Covering Capacity	: 120-140 sq. ft. / ltr / 2 coats (Spreading by brush on smooth surface)
Drying Time	: Surface Dry maximum 4 Hrs.(28°-30°C & 60 ± 5% R.H.) Hard dry 24 Hrs.
Finish	: Smooth Lustre like Finish
Flash Point	: Above 35°C
Shades	: White & Base White

# PEARL LUSTRE INTERIOR WALL FINISH



**Pearl Lustre Interior Wall Finish** is a solvent-based paint specially formulated based on special resins and pigment for interior applications. Pearl like Lustre is the unique feature of this finish paint. It is suitable for interior cement plastered wall, wooden / hard board surfaces, ceilings etc. It is ideal for hard working areas like kitchens, bathrooms, corridors etc. Pearl Lustre finish is washable and retains its pearl like lustre finish for years.

## PRODUCT FEATURES

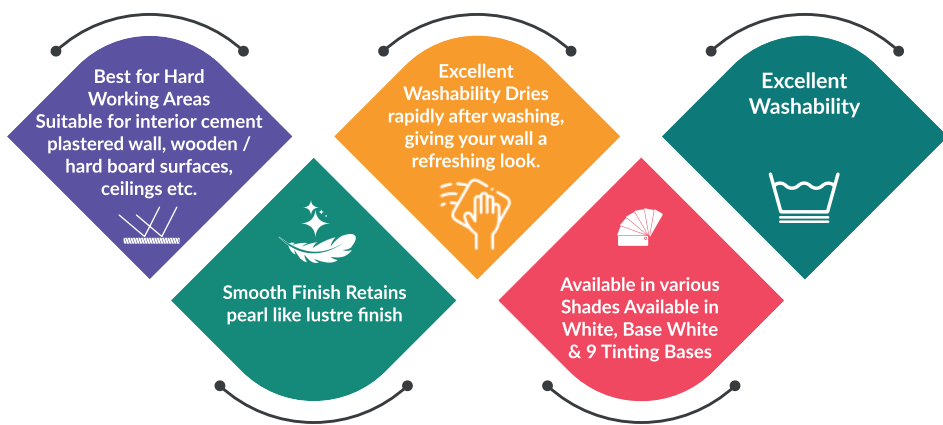

### PACKS AVAILABLE



## HOW TO APPLY

Performance of Pearl Lustre Emulsion depends on surface preparation & application as outlined below.

### Step -1

Ensure that the surface is free from loose particles, dirt, dust, grease, oil, moisture etc.

### Step -2

Surfaces previously painted with oil bound distemper, flat oil paint, emulsion paint etc. should be in a sound condition, and needs to be thoroughly sanded with emery paper No. 280-300 to dull matt for proper adhesion.

### Step -3

If surfaces are previously painted with dry distemper (lime wash) or ordinary distemper (chalking out), the coats are to be completely scraped off.

### Step -4

Wash with water and dry. Apply two coats of recommended primer with interval of minimum 18 hrs. between coats. Sand with emery paper no. 300-320 and apply two coats of Pearl Lustre with an interval of minimum 18 hrs. between the coats.

(The information herein is given in good faith. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface)

(Please note that this product technical data sheet supersedes all previous versions.)