



## TECHNICAL DATA

Areas of Application	: All types of plasters, hard boards, false ceiling, asbestos sheets & concrete
Consistency	: Thick and Buttery
Thinner	: Municipal / Potable Water
Method of Application	: Brush / Roller
Spreading Capacity	: 140-160 sq. ft. / ltr. / 2 coats (Actual coverage may vary depending on method, condition of application, surface porosity and shade)
Drying Time	: Surface dry time 15-25 minutes
Finish	: Smooth Matt with Superior Sheen
Shades Available	: As per shade card (Refer to Colormenu Fandeck)

# SHEER CLASS SPLENDOR


## LUXURY INTERIOR EMULSION



**British Paints Splendor** is a water-based, 100% Acrylic Interior Wall finish which gives your walls high sheen, excellent scrub resistance & a truly luxury finish.



## PRODUCT FEATURES

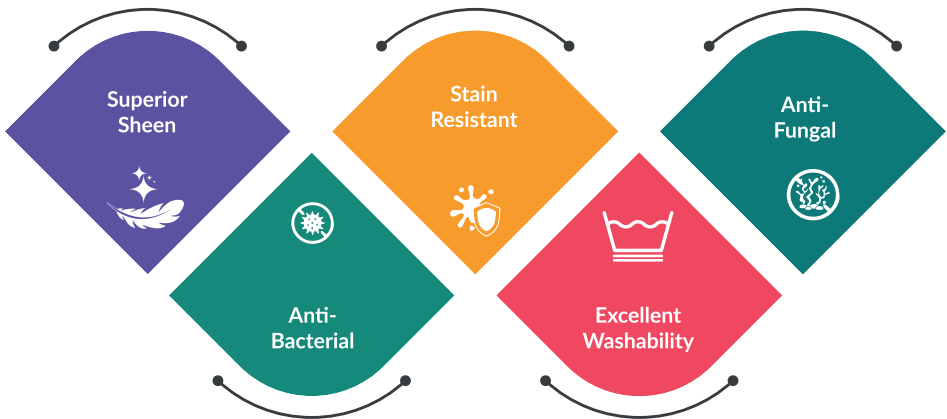

### PACKS AVAILABLE



## HOW TO APPLY

Performance of Splendor Interior Emulsion depends on surface preparation & application as outlined below.

### SURFACE PREPARATION

Sand the surface with emery paper no. 180 to remove loose particles, paint, dust, cracked & flaked paint and wipe clean.

### PRIMER

Apply a coat of British Paints Solvent Thinnable or Water Thinnable Acrylic Cement Primer (for repairing use Water Thinnable Acrylic Cement Primer and for new surface Solvent Thinnable Primer is recommended) and allow drying for 6-8 hours.

### PUTTY

Smoothen the surface by filling dents with a thin coat of British Paints Acrylic Wall Putty and allow drying for 4-6 hours. Sand the surface with emery paper no. 180 and wipe clean.

### PRIMER

Apply another coat of British Paints Solvent Thinnable Primer or Water Thinnable Acrylic Cement Primer and allow drying 6-8 hours. Sand the surface with emery paper no. 320 and wipe clean.

### TOP COAT

Thin 1 litre of Splendor with 400-500 ml of water. Apply 2-3 coats of this thinned paint with a gap of 3-4 hours in between two coats.

(The information herein is given in good faith. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface)

**(Please note that this product technical data sheet supersedes all previous versions.)**