



## TECHNICAL DATA

Areas of Application	: Cement plaster, concrete stone, brick asbestos, cement sheet & all types of building boards
Caution	: Not recommended on lime wash
Viscosity of Supply	: 10 ± 2 Ps/Rotthinner/30°C
Thinner	: Municipal/Potable Water
Thinner Ratio	: Paint: water 100:40 by volume for each coat
Method of Application	: Brush/Roller
Primer	: Acrylic Exterior Wall Primer or on highly absorbent or chalky surface, apply a coat of Optima 7 Waterproofing Exterior Emulsion thinned with water (1:1 by volume) as a self-priming coat to reduce surface porosity and thereby reducing the degree of absorption of subsequent finish coats.
Spreading Capacity	: 60- 65 sq. ft./ ltr./2 coats
Drying Time	: Surface dry maximum 1 Hrs. (28°- 30°C & 60 ± 5% R.H.) Recoating period minimum 2-4 Hrs.
Finish	: Smooth with Sheen ( under standard test conditions 60°C GH 7 to 8 )
Shades Available	: As per Shade Card

# OPTIMA 7


## WATERPROOFING

### EXTERIOR EMULSION



**British Paints Optima 7 Waterproofing Exterior Emulsion** is a 100% acrylic emulsion paint especially formulated for superior performance on exterior walls due to its unique water resistant properties against fungi, algae and dampness caused by lashing rain. British Paints Optima 7 Waterproofing Exterior Emulsion has anti-carbonation property ( added structural protection – which does not allow carbon dioxide & chloride ions to penetrate into the structure ) when applied as a system i.e. British Paints Supra Exterior Wall Primer as a base coat plus British Paints Optima 7 Waterproofing Exterior Emulsion as top coat.

## PRODUCT FEATURES

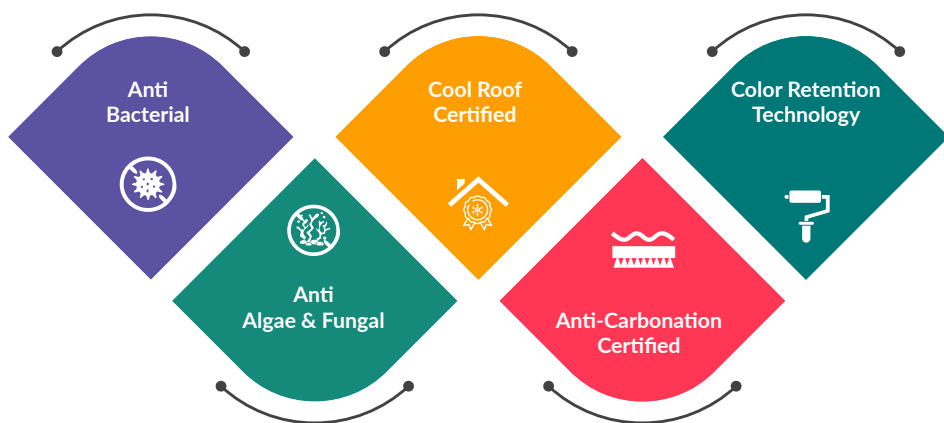

### PACKS AVAILABLE



## HOW TO APPLY

Performance of Optima 7 Waterproofing Exterior Emulsion depends on surface preparation & application as outlined below.

### SURFACE PREPARATION

Ensure that the surface to be painted is thoroughly clean, dry and free from all loose dirt, chalk, grease, fungi, algae and flaking paint. Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing & cleaning with water. Freshly plastered surfaces must be cured completely.

### PUTTY

Surface imperfections like holes, dents and cracks are to be filled with British Paints Shield Wall Putty.

### PRIMER

Apply one coat of British Paints Acrylic Exterior Wall Primer by thinning with water in the ratio of 1:1 by volume. Allow primer to dry for at least 4-5 hours.

### TOP COAT

Apply 2-3 coats of British Paints Optima 7 Waterproofing Exterior Emulsion by diluting 1 litre of British Paints Optima 7 Waterproofing Exterior Emulsion with a maximum of 400 ml of water. Keep an interval of 4-6 hours in between two coats.

(The information herein is given in good faith. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface)

(Please note that this product's technical data sheet supersedes all previous versions.)