



TECHNICAL DATA

Thinner	: Water
Dilution (%)	: 100
Recoating Period	: 4-6 Hrs.
Coverage	: 1 coat 20-25 sq. mt./ltr./coat depending on surface & surface preparation
Drying Time	: 4-6 Hrs.
Gloss levels / Sheen Levels	: Matt
Shelf Life	: 3 years from date of manufacture in original tightly closed containers away from direct sunlight & excessive heat.
Post Application Instructions	: N/A
Safety Features	: Non-flammable
Shade Range	: White

CEMENT PRIMER

SMART




Cement Primer Smart is a water-based wall primer that can be used on interior masonry surfaces. It is also suitable for priming plastered walls, asbestos, cement, concrete, etc.

PRODUCT FEATURES



PACKS AVAILABLE

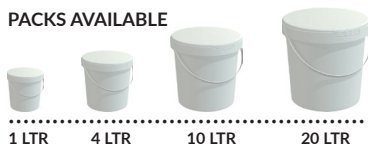

HOW TO APPLY

Performance of Cement Primer Smart depends on surface preparation & application as outlined below.

SURFACE PREPARATION

Sand the surface with emery paper no. 180 to remove loose particles, paint, dust, cracked & flaked paint, and wipe clean.

PRIMER

Apply a coat of British Paints Cement Primer Smart by thinning with water in the ratio of 1:1 by volume and allow drying for 6-8 hours.

APPLICATION

Smoothen the surface by filling dents with a thin coat of British Paints Acrylic Wall Putty and allow drying for 4-6 hours. Sand the surface with emery paper No. 180 and wipe clean.

PRIMER

Apply another coat of British Paints Cement Primer Smart and allow drying for 6-8 hours. Before application of topcoat, sand the surface with emery paper no. 320 and wipe clean.

(The information herein is given in good faith. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface)

(Please note that this product's technical data sheet supersedes all previous versions.)