



## TECHNICAL DATA

Areas of Application	: Cement Plaster, Concrete Stone, Brick Asbestos, Cement Sheet & all types of Building Boards
Caution	: Not recommended on lime wash
Viscosity of Supply	: $10 \pm 2$ Ps/Rotthinner/30°C
Thinner	: Municipal/Potable Water
Thinner Ratio	: Paint : water 100:40 by volume for each coat
Method of Application	: Brush/Roller
Primer	: On highly absorbent or chalky surface, apply a coat of Expa 2 in 1 thinned with water (1: 1 by volume ) as a self-priming coat or Exterior Wall Primer to reduce surface porosity and thereby reducing the degree of absorption of subsequent finish coats
Spreading Capacity	: 60-65 sq. ft./litr./2 coat
Drying Time	: Surface dry maximum 1 Hrs. (28°- 30°C & 60 ± 5%R.H.) Re-coating period minimum 4 Hrs.
Finish	: Smooth with Sheen
Shades Available	: As per Shade Card


# EXPA 2 IN 1

## EXTERIOR EMULSION




**Expa 2 in 1 Exterior Emulsion** is a 100% acrylic high-built exterior paint made to international standards that keeps exteriors looking bright and new for many years. Expa 2 in 1 provides dual protection i.e. it protects the surface from extreme heat and rains due to the presence of Anti-Sun and Anti-Rain formula. It is a high-performance architectural coating for all types of construction including residential buildings, offices, and commercial complexes. With tough adhesion and flexibility, its light fast chemical resistant pigments and other special additives, provide protection against alkali, U.V. degradation, fungal and algae growth.

## PRODUCT FEATURES

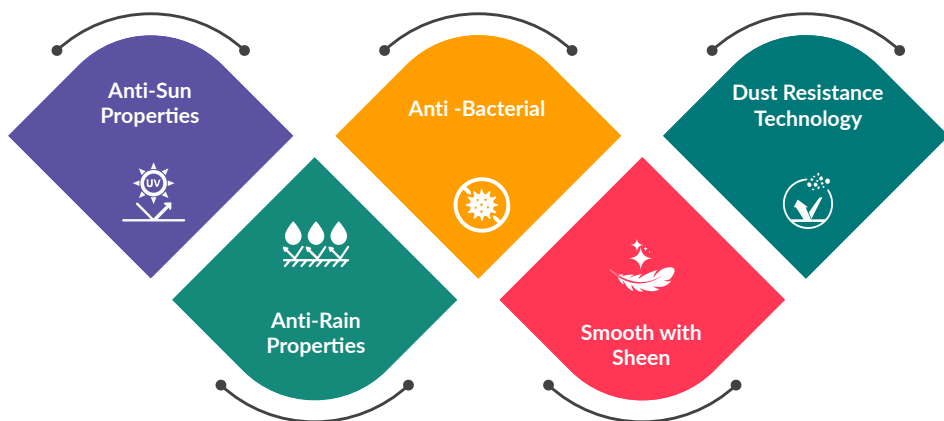

### PACKS AVAILABLE

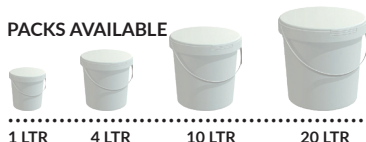

## HOW TO APPLY

Performance of Expa 2 in 1 depends on surface preparation & application as outlined below.

### SURFACE PREPARATION

Ensure that the surface to be painted is thoroughly clean, dry and free from all loose dirt, chalk, grease, fungi, algae and flaking paint. Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing & cleaning with water. Freshly plastered surfaces must be cured completely.

### PUTTY

Surface imperfections like holes, dents and cracks are to be filled with British Paints Shield Wall Putty.

### PRIMER

Apply one coat of British Paints Supra Acrylic Exterior Wall Primer by thinning with water in the ratio of 1:1 by volume. Allow primer to dry for at least 4-5 hours.

### TOP COAT

Apply 2-3 coats of Expa 2 in 1 by diluting 1 litre of Expa 2 in 1 with a maximum of 400 ml of water. Keep an interval of 4-6 hours in between two coats.

(The information herein is given in good faith. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface)

(Please note that this product's technical data sheet supersedes all previous versions.)