



## TECHNICAL DATA


Areas of Application	: Cement Plaster, Asbestos Sheet, Concrete etc.
Viscosity of Supply	: 100-112 Krebs Units on Stormer Viscometer at 30°C
Consistency	: Smooth and Free-Flowing
Thinner	: Municipal/Potable Water
Thinner Ratio	: 75% by volume with water for each coat
Method of Application	: Brush/Roller
Drying Time	: Touch dry in 30 minutes
Recoating Period	: About 4-6 Hrs.
Coverage on Normal	: Rough Cement Plaster 55-60 sq. ft./ltr./2 coats
Finish	: Smooth and Matt
Shades Available	: As per Shade Card

# SHINGAR ADVANCED EXTERIOR EMULSION



**Shingar Advanced Exterior Emulsion** it is an acrylic co-polymer with added silicon protection and is best suited for application on exterior walls in dry or moderately humid climatic conditions. It is an acrylic co-polymer, emulsion-based wall coating for exteriors. Its unique formulation ensures that the product has excellent adhesion to different types of surfaces like cement plasters, asbestos etc. Once the film dries hard, it exhibits excellent resistance to chalking, cracking and weathering. Shingar Advanced Exterior Emulsion has a wide range of non-fading and hence gives a long-lasting shade. It offers good anti-algae properties in dry to moderately humid climatic conditions. However, it may not completely prevent the growth of black algae spots in areas with excessive rainfall or coastal belts.

## PRODUCT FEATURES

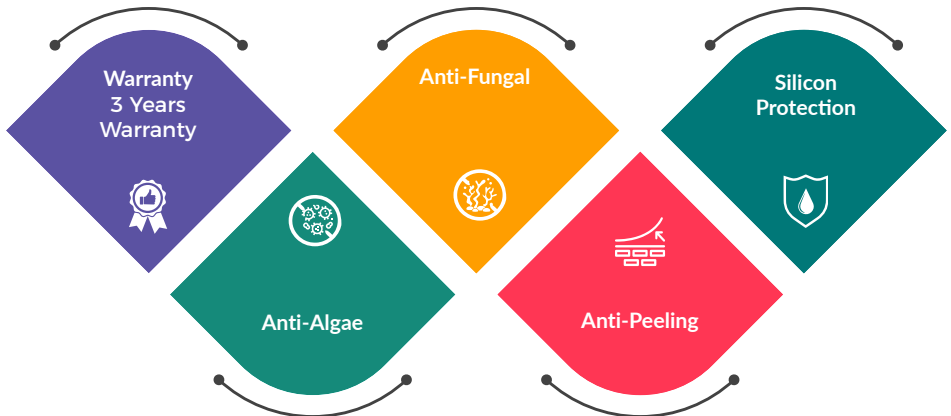

PACKS AVAILABLE



## HOW TO APPLY

Performance of Shingar Advanced depends on surface preparation & application as outlined below.

### SURFACE PREPARATION

Ensure that the surface to be painted is thoroughly clean, dry and free from all loose dirt, chalk, grease, fungi, algae and flaking paint. Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing & cleaning with water. Freshly plastered surfaces must be cured completely.

### PUTTY

Surface imperfections like holes, dents and cracks are to be filled with British Paints cement based Wall Putty.

### PRIMER

Apply one coat of British Paints Supra Acrylic Exterior Wall Primer by thinning with water in the ratio of 1:1 by volume. Allow primer to dry for at least 4-5 hours.

### TOP COAT

Apply 2-3 coats of Shingar Advanced by diluting 1 litre of Shingar with a maximum of 400 ml of water. Keep an interval of 4-6 hours in between two coats.

(The information herein is given in good faith. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface)

(Please note that this product's technical data sheet supersedes all previous versions.)