



TECHNICAL DATA

Areas of Application	: Cement Plaster, Asbestos Sheet, Concrete, etc.
Consistency	: Smooth and Free-Flowing
Thinner	: Municipal/Potable Water 60% by volume with water for each coat
Method of Application	: Brush/Roller
Drying Time	: Touch dry in 30 minutes
Recoating Period	: About 4-6 Hrs
Coverage	: 55-60 sq. ft./ltr./2 coats
Finish	: Smooth and Matt
Shades Available	: As per Shade Card

SHINGAR SMART

EXTERIOR EMULSION




British Paints Shingar Smart Exterior Emulsion is an acrylic co-polymer emulsion-based wall coating for exteriors. Its unique formulation ensures that the product has excellent adhesion to different types of surfaces like cement, plaster, asbestos, etc. Once the film dries hard, it exhibits excellent resistance to chalking, cracking, and weathering in comparison to cement paint. Shingar Smart Exterior Emulsion gives clean and non-fading shades and ensuring long-lasting performance much better than cement paint shades. It offers good anti-algal properties in dry to moderately humid climatic conditions.

PRODUCT FEATURES



PACKS AVAILABLE

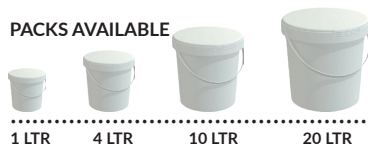

HOW TO APPLY

Performance of Shingar Smart depends on surface preparation & application as outlined below.

SURFACE PREPARATION

The surface to be painted should be cleaned of all loose paint, dust, grease, and fungus or algae growth. Only cement plaster should be used to fill imperfections of the surface.

PUTTY/PRIMER

Use of Shield/British White Cement Based Wall Putty and Acrylic Exterior Wall Primer is recommended to set a Smooth and Better finish.

EMULSION

Shingar Smart Exterior Emulsion should be applied by thinning 1 litre of paint with 400 ml. of water with a gap of 4-6 hours between coats. Shingar Smart Exterior Emulsion can be applied by brush or roller.

(The information herein is given in good faith. Covering capacity is indicated on the basis of results obtained on a prepared smooth surface)

(Please note that this product technical data sheet supersedes all previous versions.)